


Long sliding clip with countersunk holes

Versions:

For different seam heights:	25 mm (standard)	Article-No.: HA-8360-70
	28 mm	Article-No.: HA-8360-728
	30 mm	Article-No.: HA-8360-730
	32 mm	Article-No.: HA-8360-732
	38 mm	Article-No.: HA-8360-738
Material:	Stainless steel V2A	Material-No. 1.4301
		AISI: 304
	Stainless steel V4A	Material-No. 1.4401
		as special design available.
Thickness:	0,4 mm	
	0,5 mm as special design possible	

Illustration:

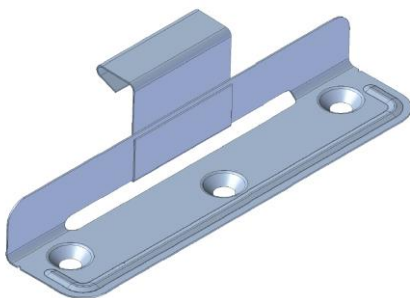

Description:

Long sliding clip for angle- and double standing seam

Sliding range: 75 mm

Upper and bottom part are pre-assembled.
Attach on the pre-profiled standing seam.
Bottom part with special holes for countersunk screws.

Measurements and material thickness according to the expert
Regulations of the German plumping crafts.

Due to a wider sliding range of 75 mm, suitable for longer
sheets. Usable sheet lengths as given from the expert
regulations of the German plumping crafts.

Packing unit: 400 pcs.

One of its features is the high durability during extra strong demands. For this model we use a bottom part with 0.5 mm thickness. Bottom part also comes with beading and rounded edges. Based on this innovation the clips barely bend up. It is most important to mount the clips absolutely accurate! It's indispensable to rework protruding nails or screws to avoid the damaging of the roof layer. Due to the special shaping of the upper part, a slight clamp-effect is achieved. As a result, the attached clips will not slip down during the assembly process.

Please note our large product range around metal roofs: snow retention systems, step brackets, solar holders and our program about clips. Further informations you will find on our homepage.